

High spin washer extractors

BWH 10-13-18-25 MP

Features and benefits

➤ Construction

- Build in stainless steel.
- Door lock with security system.
- Frequency inverter drive.
- No fixing to the ground needed.

➤ Control

- Programmable microprocessor controlled MP.
- 16 standard washing programs and possibility to create another 84, freely selecting all variables (temperature, spinning speed, etc.)
- Graphic screen to follow wash and programming phases.
- Keyboard for easy programming and operation (8 keys).
- PC RS-232 output.
- Possibility to program from PC or to transfer programs.
- Standard languages: 9 + 1 free election (Spanish, English, French, Italian, German, Portuguese, Polish, Turkish, Russian)

➤ Dosing

- Detergent box with 4 compartments (prewash, wash, bleach and softeners).
- Up to 7 dosing signals. 3 Water inlets.
- Possibility to incorporate an automatic dosing unit easily from the back of the machine.

WET CLEANING: system included

- Water levels totally modifiable.
- Possible manual dosing of the 7 signals during washing.
- Minimum wash speed: 15 r.p.m.,
- Minimum ON-OFF sequence: 1 second.

➤ Heating alternatives

- Electric, steam or hot water.

Main options:

- Double drain kit.
- Marine version.



Main features:

		BWH10	BWH13	BWH18	BWH25
Loading capacity (1:10)	Kgs.	10	13	18	25
Drum diameter	mm.	532	620	700	770
Drum depth	mm.	425	430	470	530
Spinning.	rpm.	1000	1000	950	900
G-factor		300	350	350	350
Loading door diameter	mm..	290	373	373	373
Sound level	dB	60	60	60	60

Consumption data:

		BWH10	BWH13	BWH18	BWH25
<u>Electricity</u>					
Max. Power. (v. Elect.)	Kw.	6.75	10.00	14.20	21.00
Heating power	Kw.	6	9	12	18
Power (steam & hot water)	Kw	0.75	1	2.2	3
<u>Connections</u>					
		230 I+N+T NO	230 I+N+T NO	230 I+N+T NO	230 I+N+T NO
		230 III+T 3x2.5+T 25 A	230 III+T 3x4+T 32A	230 III+T 3x5+T 40A	230 III+T 3x6+T 40A
		400 III+N+T 4x1.5+T 16 A	400 III+N+T 4x2.5+T 20A	400 III+N+T 4x2.5+T 25A	400 III+N+T 4x2.5+T 25A
<u>Water</u>					
Working pressure	Kg/cm2	2-4	2-4	2-4	2-4
<u>Steam</u>					
Working pressure	Kg/cm2				
Consumption	Kg/h				

Dimensions and weights:

<u>Machine dimensions</u>		BWH10	BWH13	BWH18	BWH25
Width	mm	692	788	884	980
Depth	mm	805	870	914	1.040
Height	mm	1.155	1.300	1.404	1.565
Weight	Kg.	208	250	340	500
Volum	m3	0.64	0.89	1.13	1.60
<u>Packed dimensions</u>					
Width	mm	740	840	935	1.150
Depth	mm	995	1.010	1.040	1.270
Height	mm	1.350	1.450	1.550	1.805
Weight	Kg.	223	270	365	530
Volum	m3	1.00	1.00	1.33	2.63

We reserve the right to make changes without notice.
The data in this form are not binding and depend on the conditions of each location.

BÖWE


Textile Cleaning

BÖWE TEXTILE CLEANING ESPAÑA, S.L.

Vía Trajana, 50-56. Nave 44. 08020 BARCELONA. España.
Tel. 34-93-3131733 Fax. 93-3145484. info@bowe.es
www.bowe.es www.boewe-tc.de - www.ziermann.com

Connections:

Mod.	Toma	Diam pulg.	X mm.	Y mm	Z mm.
Cold water	BWH10	3/4	623	0	1.070
	BWH13	3/4	714	0	1.216
	BWH18	3/4	815	0	1.320
	BWH25	3/4	815	0	1.320
Hot water	BWH10	3/4	468	0	1.050
	BWH13	3/4	554	0	1.196
	BWH18	3/4	660	0	1.300
	BWH25	3/4	660	0	1.300
Soft water	BWH10	3/4	413	0	1.050
	BWH13	3/4	494	0	1.196
	BWH18	3/4	606	0	1.300
	BWH25	3/4	606	0	1.300
Drain	BWH10	2	252	0	80
	BWH13	2	269	0	80
	BWH18	2	347	0	80
	BWH25	2	347	0	80
Elect.	BWH10	-	106	0	871
	BWH13	-	108	0	1.022
	BWH18	-	109	0	1.129
	BWH25	-	109	0	1.129
Steam	BWH10				
	BWH13				
	BWH18				
	BWH25				

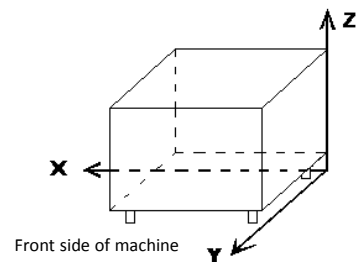

CE

Your BÖWE partner: